

Hybridisation of PTS-Clipping Techniques to Progress PAPR in MIMO-OFDM Systems

Raj Lakshmi Shukla¹ and Monika Singh²

Department of Electronics Communication Engineering, National Institute of Technical Teachers Training and Research, Sector 26, Chandigarh 160019, India
¹rajlakshmi.shukla@gmail.com, ²monikasngh29@gmail.com

Abstract — The multiple input multiple output (MIMO) with orthogonal frequency division multiplexing (OFDM) is considered a promising solution to augment the channel capacity and multiplicity of wireless communication system without any enhancement in bandwidth. In this paper, an amalgam or hybrid combinational scheme is intended to reduce peak-to-average power ratio in MIMO-OFDM system under Rayleigh fading environment on an additive white Gaussian Noise channel. The proposed method intelligently fits in both clipping sequence and partial transmit sequence schemes. The results show that the proposed method not only reduces the PAPR but also maintains satisfactory bit error rate and computational complexity compared to other schemes.

Keywords: Clipping Techniques, MIMO OFDM, PAPR, AWGN.

I. INTRODUCTION

IN THE present scenario, 3G is not enough as the ever growing demands of multimedia services, online gaming etc. need higher speed of data. This can be achieved using 4G wireless technology. Multiple-input multiple-output (MIMO) with Orthogonal frequency division multiplexing (OFDM) is considered one of the promising solutions for increasing data rates in wireless communication systems. The main limitation of MIMO-OFDM system is its high peak-to-average power ratio (PAPR) of the transmitted signals which needs to be reduced. Antenna performance can be improved by applying a method known as MIMO and the caveat sign can be improved by the modulation technique of OFDM. This concept, as a whole, is known as MIMO-OFDM, and forms the basis of 4G technology.

OFDM is widely used technique due to its robustness and higher data rate transmission over frequency selective fading channel [1]. MIMO with OFDM is an alternative approach to achieve higher spectrum efficiency and data throughput for broadband wireless communication system without any expansion in the bandwidth [2, 3]. To further improve the overall system performance over channels with large delay spread, the space time block coding (STBC) technique [4] is also applied in MIMO-OFDM. Though, the MIMO-OFDM [5–7] offers multitudinous benefits, when large peak signals enter amplifier

saturation region, deformation occurs. This increases PAPR of the system and reduces its recital and performance in terms of bit-error rate (BER).

In literature, various conventional [8–11] and hybrid [12–16] techniques were proposed for reducing the PAPR of MIMO-OFDM system. Each straight scheme possesses its own merits and demerits in terms of the out-of-band interference, and data rate loss. Though, the hybrid method combines a couple of conventional schemes together and accumulates their remuneration and benefits in a combinational approach, but the computational complexity in combinational method is also a major issue of apprehension. Therefore, in this paper, a parallel combination of clipping and partial transmit sequence (PTS) schemes are prudentially applied to augment the performance of MIMO-OFDM system. The proposed method not only reduces the PAPR of MIMO-OFDM signals but also maintains the data rate and provides low in-band ripples and out-of-band radiations. Moreover, the proposed scheme also offers less computational complexity compared to an alike combinational scheme.

OFDM is today a widespread technique for broadcast and transmission of signals over wireless channels and adopted in many wireless standards. OFDM may be united with antenna arrays at the transmitter and receiver side to improve the diversity gain and to improve the system competence on time-

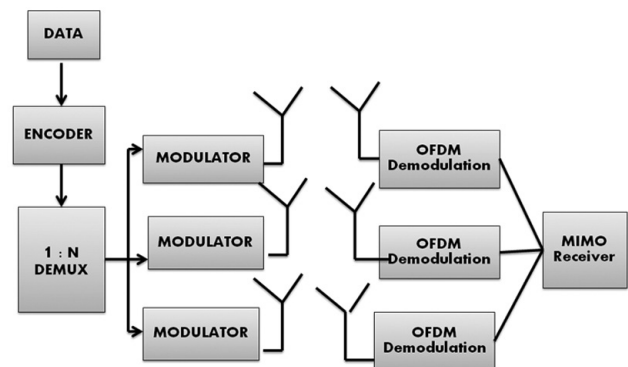


Figure 1. Block diagram of MIMO-OFDM system.

variant frequency-selective channels, resulting in a multiple-input multiple-output composition.

II. MIMO-OFDM ORGANIZATION

Multiple Input Multiple Output Orthogonal Frequency division multiplexing is a technique that uses multiple antennas to send and get back radio signals. The block diagram of desired scheme for MIMO-OFDM system is shown in Figure 1 which has N number of antennas at transmitter and receiver side.

OFDM can transform a frequency-selective MIMO channel into a set of parallel frequency-flat MIMO channels and thus increase the frequency efficiency. Therefore, MIMO-OFDM technology was researched as the infrastructure for next generation wireless networks. MIMO wireless systems, combined with OFDM, allowed for easy transmission of symbols in time, space and frequency. MIMO-OFDM takes advantage of the multipath properties of environments [17] using base station antennas that do not have LOS and uses both the advantages of MIMO and OFDM.

Combination of MIMO and OFDM techniques will impact the evolution of wireless LANs, and is a leading contender for fourth generation (4G) wireless communications systems. Therefore, MIMO-OFDM [18] system is a welcome proposal for 4G mobile communication systems. Advantage is very high competence, spectral efficiency and improved communications reliability *i.e.*, reduced bit error rate (BER) [19] achieved at reasonable computational complexity.

III. SYSTEM MODEL

Considering MIMO OFDM system with a configuration in which the input data stream is the mapped into N number of orthogonal symbols. The space time block coding [20] is used to improve the overall performance of MIMO-OFDM system.

The time domain signal $\tilde{x}_i(n)$ is obtained by IFFT operations

$$\tilde{x}_i(n) = \frac{1}{\sqrt{N}} \sum_{k=0}^{LN-1} \hat{x}_i(k) e^{j2\pi nk} \quad (1)$$

where $i=1, \dots, N_t$ and $n=0, 1, \dots, LN-1$. L is the oversampling factor. PAPR can be defined as the relationship between the maximum power of a sample in a transmit OFDM symbol and its average power, and it is written as,

$$\text{PAPR} = \max_{0 \leq n \leq LN-1} \frac{|\tilde{x}_i(n)|^2}{E[|\tilde{x}_i(n)|^2]} \quad (2)$$

where $E[.]$ symbolizes the expectation. The PAPR performance is portrayed by using complementary cumulative distribution function (CCDF), which is defined as the chance of the

transmitted signal exceeding a given PAPR threshold λ and is given by

$$\text{CCDF} = 1 - \Pr\{\text{PAPR} \leq \lambda\} = 1 - (1 - e^{-\lambda})^N \quad (3)$$

IV. SELECTION OF PAPR REDUCTION SCHEMES

In general, the PAPR reduction schemes are broadly classified into four main categories:

Signal distortion: The PAPR reduction is possible by distorting the OFDM signal non-linearly in time domain. The clipping and filtering technique, peak windowing and non-linear companding are a few methods of this kind. Performance of clipping scheme is easy, but its BER presentation degrades due to in-band signal distortion [21]. The Non-linear Companding mainly focuses on enlarging small amplitude signals whilst keeping peak signals unchanged, and so it increase the average power of the transmitted signals and possibly results in degradation of the BER performance with the increase in value of μ .

Coding methods: The concept behind the coding schemes is to lessen and cut the occurrence probability of the same phase of N signals [22]. The coding method reduces the PAPR, but it suffers from bandwidth efficiency, in particular for a large number of sub-carriers.

Scrambling techniques: The Selective Mapping (SLM) and Partial Transmit Sequence (PTS) are two proven schemes of this category which partitions different scrambling sequences and selecting that sequence which gives smallest PAPR. The major drawbacks of these schemes are computational complexity and requirement of side-information to recover original data block at the receiver side.

Pre-distortion method: These methods are based on the re-orientation or spreading the vigour and energy of data symbol, which include DFT spreading, pulse shaping or pre-coding and constellation shaping schemes. The Tone Reservation (TR), Active Constellation Extension (ACE), and Tone Injection (TI) are two fit techniques for PAPR reduction which are based on the reorientation (shaping) of constellation. The Active Constellation Extension (ACE) practice is used to obtain good performance including PAPR reduction and low complexity [23]. The main advantage of ACE is that it does not require any side information to recover original sequence.

The hybrid/combinational methods seem to be a better choice for PAPR reduction because it possesses the merits of both techniques used in combination. Therefore, in this paper, a hybrid schemes based on clipping and partial transmit sequence (PTS) is taken. In this section, the proposed hybrid PAPR reduction technique which has been obtained by the alliance of PTS method with clipping method is presented. One performs linear conversion or transformation by rotating the vectors from

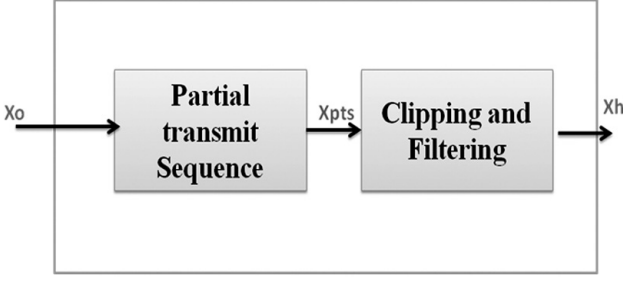


Figure 2. Hybrid PTS-Clipping Scheme.

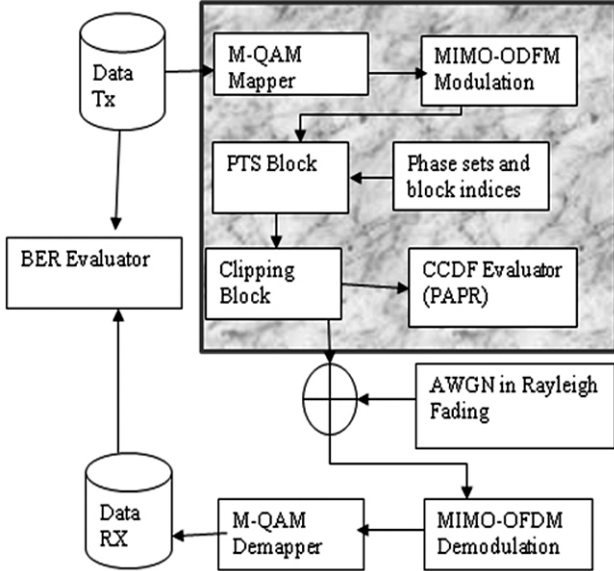


Figure 3. Proposed Sculptr for the analysis of hybrid PAPR reduction technique and BER improvement.

the frequency-domain signal, and the other one performs a non-linear alteration represented by signal limitation. The block diagram of the put forwarded method is presented in Figure 2.

The presentation and recital of the proposed PAPR diminution or reduction technique is hereby analyzed with a MATLAB simulator as presented in Figure 3.

Within this simulator, the samples from the generated signal are mapped from binary representation to the M-QAM constellation points. The obtained complex values are grouped in blocks of N elements each, forming the MIMO-OFDM symbols. Similar to [24] we consider a generic MIMO-OFDM/A downlink scenario with one base station (BS) employing antennas. An OFDM block with subcarriers is transmitted from each antenna. The subcarriers comprises of useful subcarriers surrounded by two guard bands with zero energy. The useful subcarriers are thronged into resource blocks (RBs) each consisting of subcarriers. Data of one or many users is placed in these RBs and mapped into the space-time domain using an inverse discrete Fourier transform (IDFT) and space-time block coding (STBC). To allow channel inference at the receivers (mobile

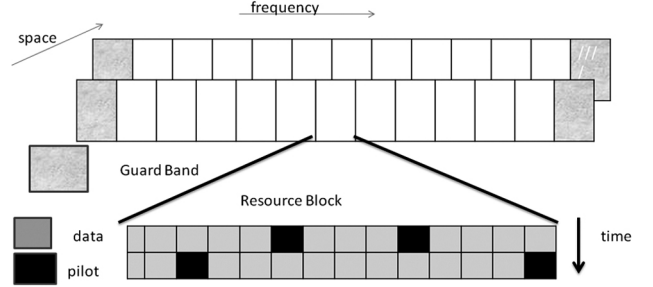


Figure 4. Structure of data of an OFDM block for MIMO system.

stations), each RB also contains several pilot subcarriers that act as training symbols. The transmit signal model which shows the data structure of an OFDM block for a MIMO-OFDM/A is shown in figure 4.

The obtained MIMO-OFDM frames are applied sequentially to PTS block and then to clipping block. The PTS method operates on the frequency-domain signal iteratively until the best signal derivate is actually found. The main idea of this approach is to alter the phases of the vectors composing the signal. This method considers the signal's vectors as being grouped in disjoint blocks. The vectors from a block may have a nearby displacement, or they may be interleaved with the vectors representing another block. The algorithm applies one phase shift for each block iteratively until the signal variant having the lowest PAPR is found. In the present work, the PTS method was implemented considering contiguous or nearby blocks of same length each. To add on, for a better PAPR reduction, the proposed PTS method performs position swap between these blocks.

V. PARTIAL TRANSMIT SEQUENCE (PTS)

It is one of the most wanted techniques for PAPR reduction in OFDM. Here the input frequency domain data block is first partitioned into disjoint sub-blocks. Then each of the sub-blocks are then padded with zeros appropriately and weighted by complex phase factors. The data vector $X=[x_0, x_1, x_2, \dots, x_{N-1}]^T$ is divided in V disjoint sets, $\{X_v, v = 1, 2, \dots, V\}$, using same number of carrier for each group.

$$X^v = \sum X_v b_v \quad v=1 \text{ to } V, \quad (4)$$

where $b_v =$ are the phase factors. Select one suitable factor amalgamation $\mathbf{b}=[b_1, 2, \dots, b_v]$ which makes the result achieve optimum. At receiver to recuperate the signal, some side information about phase weighting sequences is required; this side information needs $\log_2 W^V$ bits to be transmitted separately.

VI. CLIPPING AND FILTERING

This is simplest technique used for PAPR reduction of OFDM signal. A Clip is also called as non linear saturation which is employed about the peaks to reduce the peaks before high power amplifier to lessen PAPR and so is called Clipping

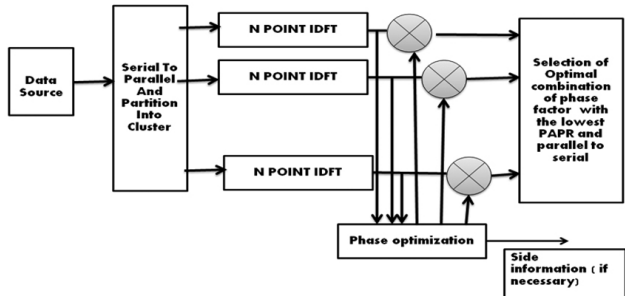


Figure 5. PTS Block Diagram.

Technique. This is simple technique but it commences Out Of Band Radiation and In Band Distortion in OFDM Signal. Joint filtering and clipping technique reduce the OOB radiation but IB distortion are still there since this method degrades OFDM system performance e.g. spectral efficiency and BER. Envelop scaling is used for PAPR reduction due to equality envelop properties of all subcarriers input [25] Clipping means the amplitude of the signal is clipped at the predefined values which limit the peak value of the input signal to a predetermined value.

Let $Y[n]$ denote the input signal and $Y_c[n]$ denote the clipped signal of $Y[n]$, which can be represented as, where B is the threshold or predetermines value of clipping level. Clipping is simple but yet it has some drawback. Clipping cause signal distortion which increase bit-error-rate

$$[n] = \begin{cases} -B & [n] \leq -B \\ [n] & | [n] | < B \\ B & [n] \geq B \end{cases} \quad (6)$$

performance. After filtering operation performed on the clipped signal, the clipping level may exceed the signal specified for the clipping operation.

VII. RESULTS

The PAPR calculation have been done for $N= 256$ and 512 FFT size having CR ratio as 12. The blue coloured graph is the CCDF for the original signal. Once PTS technique in accordance with the block diagram is applied to the original signal then, PAPR is further reduced. Now to the signal which comes after PTS block based upon the phase and block indices is sent for the clipping which actually clips the signal based upon some defined threshold value and this is the actual hybrid signal which can be seen from a cross sectional area in Figure 8 and 9. PAPR is reduced by approximately 1.7 dB which can be deduced from Figure 6 and 7 and table 1. BER performance is calculated over Rayleigh fading channel of MIMO-OFDM with AWGN which actually shows that BER performance improves as number of subcarriers decreases that is BER is better for size 256 as to 512 which can be seen from figure 8 and 9 and can be interpreted from Table 2.

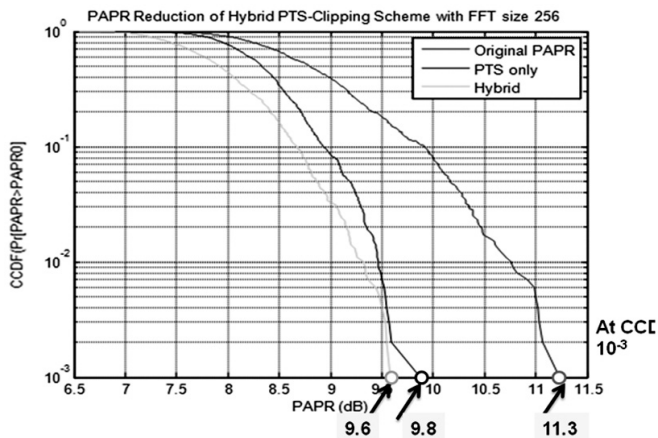


Figure 6. PAPR for FFT size-256.

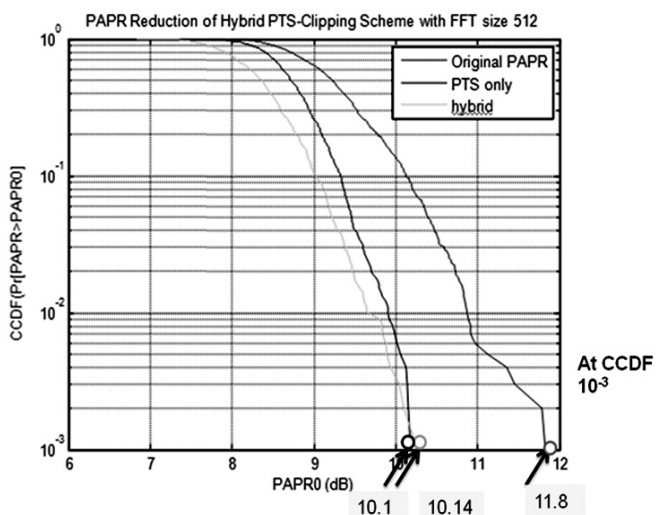


Figure 7. PAPR for FFT size 512.

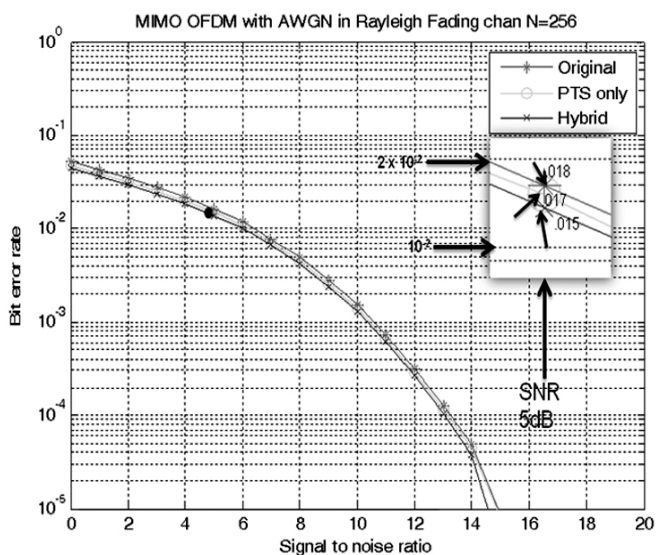


Figure 8. BER for FFT Size 256 in Rayleigh Fading Environment.

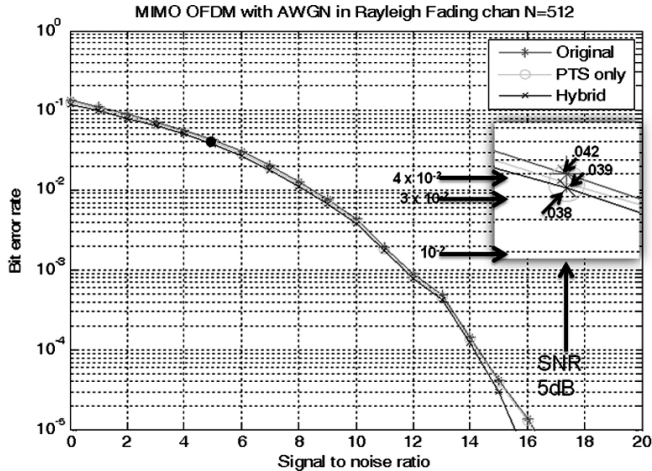


Figure 9. BER for FFT size 512 in Rayleigh Fading Environment.

TABLE 1

COMPARISON OF PAPR VALUES FOR HYBRID, PTS AND ORIGINAL PAPR SIGNAL FOR DIFFERENT FFT SIZES

FFT SIZE	Hybrid (PAPR dB)	PTS(PAPR dB)	Original PAPR(dB)
256	9.6	9.8	11.3
512	10.1	10.1	11.8

TABLE 2

COMPARISON OF BER VS. SNR FOR HYBRID, PTS AND ORIGINAL PAPR FOR DIFFERENT FFT SIZE

FFT Size	Hybrid 5 dB	Hybrid 10 dB	PTS 5 dB	PTS 10 dB	Original 5 dB	Original 10 dB
256	.015	.0015	.017	.0019	.018	.0022
512	.038	.004	.042	.0048	.049	.0052

VIII. CONCLUSION

Though all the techniques in individual and hybrid effects gives good results but still every method is having certain shortcomings. Here in this paper the hybrid PTS and clipping techniques have been implemented on MIMO-OFDM system with the number of subcarriers as 256 and 512. The significant difference is a reduction in PAPR value and also the improvement in BER is noticed which decreases as the SNR value increases.

IX. ACKNOWLEDGEMENT

Authors thank Dr. M.P. Puniya, Director NITTTT, Chandigarh, Dr. Maitrayee Dutta, HOD-ECE, NITTTT, without whose support and valuable guidance things would not have been practically implemented. Last, we thank our colleagues for giving their endless support.

X. REFERENCES

- [1]. Soo, Y., Kim, J., Yang, W. Y. and Kang, C.G “MIMO-OFDM Wireless Communications with Matlab”, 2010.
- [2]. Peppas, K., Lazarakis, F., Axiotis, D. I., Al-Gizawi, T. and Alexandridis, A. A. “System level performance evaluation of MIMO and SISO OFDM-based WLANs”. *Wireless Networks*. Volume 15, Issue 7, pp. 859-873 2009
- [3]. Urosevic, U., Veljovic, Z., & Pejanovic-Djurisic, M., “MIMO solution for performance improvements of OFDMCDMA system with pilot tone”. *ibid.*, Volume 19, Issue 8, pp. 2021-2028, 2013.
- [4]. Alamouti, S. M., “A simple transmit diversity technique for wireless communication”. *IEEE Journal on Selected Areas in Communications*, Volume 16, pp. 1451-1458, 1998.
- [5]. Kwon, U., Kim, D., Kim, K., and Im, G., “Amplitude clipping and iterative reconstruction of STBC/SFBC-OFDM signals”. *IEEE Signal Processing Letters*, Volume 14, Issue 11, pp. 808-811, 2007.
- [6]. Li, Z. and Xia, X., “Single-symbol ML decoding for orthogonal and quasi-orthogonal STBC in clipped MIMO-OFDM systems using a clipping noise model with Gaussian approximation”. *IEEE Trans. Communications*, Volume 56, Issue 7, pp. 1127-1136, 2008
- [7]. Zhu, Xiaodong, “A low-BER clipping scheme for PAPR reduction in STBC MIMO-OFDM systems”. *Wireless Personal Communications*. Volume 65, Issue 2, pp 335-346, July 2012.
- [8]. Bäuml, R. W., Fischer, R. F. H. and Huber, J. B. “Reducing the peak-to-average power ratio of multicarrier modulation by selected mapping”. *IEEE Electronics Letters*, Volume 32, Issue 22, pp. 2056-2057, 1996.
- [9]. Müller, S. H. and Huber, J. B., “OFDM with reduced peak-to-average power ratio by optimum combination of partial transmit sequences”. *IEEE Communications Letters*, Volume 33, Issue 5, pp.368-369, 1997.
- [10]. Krongold, B. S. and Jones, D. L., “PAR reduction in OFDM via active constellation extension”. *IEEE Trans. Broadcasting*. Volume 49, Issue 3, pp. 258-268, 2003.
- [11]. Mishra, A., Saxena, R. and Patidar, M. AGP-NCS scheme for PAPR reduction. *Wireless Personal Communications*. Volume 82, Issue 3, pp. 1201-1212, June 2015.
- [12]. Mishra, A., Saxena, R. And Patidar, M., “OFDM link with a better performance using artificial neural network”. *Wireless Personal Communications*, Volume 77, pp.1477-1487, July 2014.
- [13]. Ghassemi, A. and Gulliver, T. A. “PAPR Reduction of OFDM using PTS and error-correcting code sub-blocking”. *IEEE Trans. Wireless Communication*, Volume 9, Issue 3, pp. 980-989.
- [14]. Lee, B. M., Kim, Y. And de Figueiredo, R. J. P. “Performance analysis of the clipping scheme with SLM technique for PAPR reduction of OFDM signals in fading channels”. *Wireless Personal Communication*, Volume 63, issue 2, pp. 331-344, 2012.
- [15]. Duanmu, C. And Chen, H. 4), “Reduction of the PAPR in OFDM systems by intelligently applying both PTS and SLM Algorithms”, *Wireless Personal Communication*, Volume 74, Issue 2, pp. 849-863, 2014
- [16]. Pachori, K. And Mishra, A., “PAPR Reduction in MIMO-OFDM by using active partial sequence”. *IEEE Trans. Circuits, Systems and Signal Processing*, 2015

[17]. Hasegawa, T. and Shimizu, M., "Multipath interference reduction property by using multipath interference correlative timing throughout for DS-CDMA systems," *The 57th IEEE Semiannual Vehicular Technology Conference, 2003. VTC 2003-Spring.*, Volume 4, pp.2827-2831, 2003.

[18]. Oborina, Alexandra; Moisiu, Martti and Koivunen, Visa, "Performance of Mobile MIMO OFDM Systems With Application to UTRAN LTE Downlink," *IEEE Transactions on Wireless Communications*, Volume 11, no.8, pp.2696-2706, 2012.

[19]. Hasna, M.O., "Average BER of multihop communication systems over fading channels," *10th IEEE International Conference on Electronics, Circuits and Systems, 2003*, Volume 2, pp.723-726, 2003.

[20]. Ochiai, H. and Imai, H.. Performance analysis of deliberately clipped OFDM signals. *IEEE Trans. Communications*, Volume 50, Issue 1, pp. 89–101, 2002.

[21]. Li, X. and Cimini, L. J., Jr. Effects of clipping and filtering on the performance of OFDM. *IEEE Communications Letters*, Volume 2, Issue 5, pp. 131–133, 1998.

[22]. Wulich, D.). Reduction of peak to mean ratio of multicarrier modulation using cyclic coding. *IEEE Electronics Letters*, Volume 32, No. 29, pp. 432–433, 1996.

[23]. Han, S. H., Cioffi, J. M. and Lee, J. H.). On the use of hexagonal constellation for peak-to-average power ratio reduction of an OFDM signal. *IEEE Trans Wireless Communication*, Volume7, Issue3, pp. 781–786, 2008.

[24]. S. Khademi, A.-J. van der Veen and T. Svantesson, "Precoding technique for peak-to-average-power-ratio (PAPR) reduction in

MIMO OFDM/A systems," in , *2012 IEEE Int. Conf. Acoustics, Speech and Signal Processing (ICASSP)*, pp. 3005–3008, 2012.

[25]. T. Wattanasuwakull and W. Benjapolakul, "PAPR Reduction for OFDM Transmission by using a method of Tone Reservation and Tone Injection", *IEEE Trans. ICSC*, pp. 273-277, 2005.



Raj Lakshmi Shukla received the B.Tech. degree in electronics and communication engineering from Krishna Institute of Engineering and Technology, Muradnagar, Uttar Pradesh Technical University, India, in 2004. Obtained M.E. in electronics and communication engineering (Communication Systems) from Panjab University NITTTR, Chandigarh, India in 2015. She has abiding passion for teaching, with over 8 years of experience, primarily at VIET. Presented and published 6 articles. Her research interests include Communication networks, wireless communication, neural networks and fuzzy logic. She is presently with IEC, Greater Noida.



Monika Singh is M.E. scholar from Institute of Technical Teachers Training and Research, Chandigarh India. She is having five years of teaching experience. She has completed her B.Tech from Babu Banarsi Das Institute of Engineering Technology And Research Center from Uttar Pradesh in 2009. Her interest areas are Digital Signal Processing, VLSI Design, Digital Electronics, and Wireless Communication. She is presently with N.I.E.T., Greater Noida.